Testing the Cutter

For the ProCut Contour Series of Cutters

1-1 Testing

◆ Turn the cutter on.

◆ Once the cutter starts up, the screen should look like the image below.
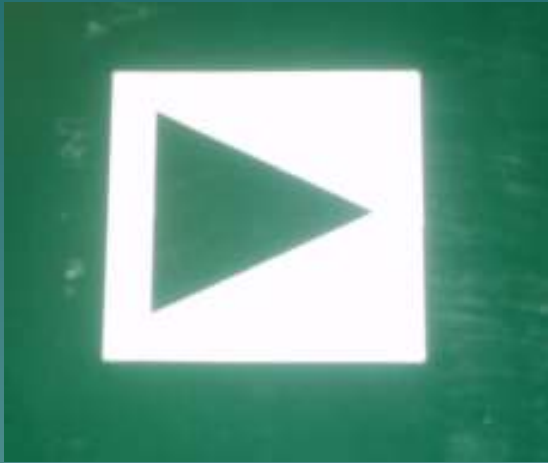
1-2 Testing

◆ Press the 'Test' button on the panel.

1-3 Testing

◆ This will cut out a small triangle on the vinyl.

◆ To look at the cut, move the vinyl forward.
  – Click the On/Off Line button and use the Speed Up and Down arrows to adjust the vinyl.

1-4 Testing

◆ Weed out the area around the triangle to ensure accuracy of pressure.

◆ If the triangle does not weed, adjust the force up by clicking the left Force arrow.

◆ If it cuts too deep, adjust the force down by clicking the right Force arrow.

1-5 Testing

◆ When finished with adjustments, move the vinyl and carriage to an area of unused vinyl.

◆ Once the blade is ready for another cut, press the Enter button.

1-6 Testing

- Repeat steps 1 through 5 until the cutter is cutting deep enough for the vinyl to weed, but not enough for the blade to cut into the backing.

- For more information on setting up the blade, see our ProCut Contour Cutter Setup Tutorial.

The End

Please review our tutorials for more information on particular features.
http://www.cutterpros.com/downloads for further information.
To speak with a technician, submit a ticket at
http://www.cutterpros.com/support/ or call 888-828-8776 x227

CUTTERPROS.COM